

# UltraFlex HDMI 2.0 »High Retention« Cable

stable connection with high traction

multi-shielded


flexible cable material

compact housing design

ergonomic strain relief



Specification	Technical Data	Applications
connectors: 2x HDMI-A	gold-plated contacts	public environments
housing structure: metal shield	data transmission: up to 18 Gbps	conference rooms
outer diameter: see table	image transmission: up to 7.5 m 4K/60Hz; up to 10 m 4K/30Hz	train stations / airports
inner conductors: copper	ratio: 21:9	events
jacket material: UltraFlex	audio: 32 channels; 1536 kHz	home cinema systems
multi-shielding	temperature range: 0°C up to +60°C (operation)	TV / consoles etc.

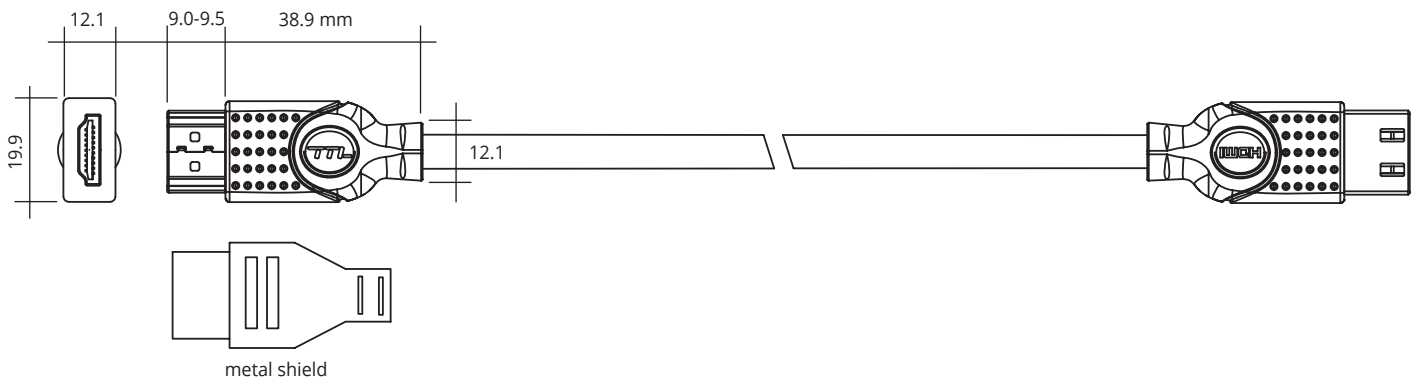

Colour: ■ black

Tests	Standards
tractive force plugs: up to 3 kg	HDMI 2.0
	UL: VW-1

Length	Outer Diameter
0.5 up to 5.0 m	7.8±0.15 mm
7.5 up to 10 m	8.0±0.15 mm
15 up to 20 m	9.0±0.15 mm

Art.No.	EAN No.	Length ± Tolerance (mm)
HDMI-MMR-0,5M-UF	4260424517980	500±30
HDMI-MMR-1,0M-UF	4260424517997	1,000±30
HDMI-MMR-2,0M-UF	4260424518000	2,000±30
HDMI-MMR-3,0M-UF	4260424518017	3,000±50
HDMI-MMR-5,0M-UF	4260424518024	5,000±50
HDMI-MMR-7,5M-UF	4260424518031	7,500±50
HDMI-MMR-10,0M-UF	4260424518048	10,000±100
HDMI-MMR-15,0M-UF	4260424518062	15,000±100
HDMI-MMR-20,0M-UF	4260424518079	20,000±100

