

# Premium UltraFlex HDMI 2.0 Cable

zinc die-cast HDMI-A connectors

highly flexible, halogen-free cable (LSOH)


robust EMC shielding

compact plug design

~5000 motion cycles



Specification	Technical Data	Applications
connectors: 2x HDMI type A	zinc die-cast connectors	public environments
housings: robust EMC shielding	data transmission: up to 18 Gbps	conference rooms
inner conductors: copper	video: up to 4K/1080p; 60fps; 3D; HDR; dual streaming	train stations / airports
outer diameter: 8.5±0.2 mm	audio: Dolby True HD; DTS-HD; up to 32 channels; 1536 kHz	events
jacket material: Ultraflex LSOH	temperature range: -10°C up to +80°C	home cinema systems
		TV / consoles etc.

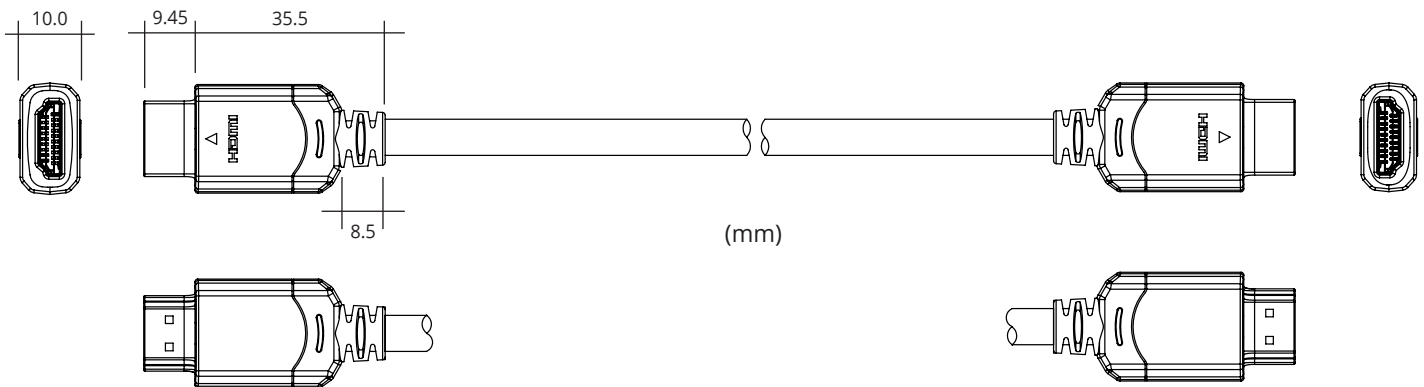

Colour: ■ anthracite RAL 7021

Tests	Standards
bending radius: 12 mm	HDMI 2.0
motion cycles: ~5.000	UL: VW-1
traction force: 12 kg	

Art.No.	EAN No.	Length +/- Tolerance (mm)
HDMI-PQ-MM-1,0M-UF	4260424510387	1.000±30
HDMI-PQ-MM-1,5M-UF	4260424510455	1.500±30
HDMI-PQ-MM-2,0M-UF	4260424510462	2.000±50
HDMI-PQ-MM-3,0M-UF	4260424510479	3.000±50
HDMI-PQ-MM-5,0M-UF	4260424510486	5.000±70
HDMI-PQ-MM-7,5M-UF	4260424510493	7.500±100
HDMI-PQ-MM-10,0M-UF	4260424510509	10.000±100

