

USB 3.1 AOC Hybrid Video Cable Type C

transmission up to 8K/60Hz and 32.4 Gbps


EMC shielded

high-quality metal housings

jacket material CPR certified



Specification	Technical Data	Applications
connector Source: USB-C (TX)	image resolution: bis 8K@60 Hz; 1080p, 1080i, 720p	public environments
connector Display: USB-C (RX)	HDCP, EDID, CEC, 3D	industry / engineering
housing material: metal	data transmission: up to 32.4 Gbps	train stations / airports
cable structure: glass fibers / copper	EMI / RFI significantly reduced	events
jacket material: PVC*	temperature range: -40°C up to +70°C (operation)	home cinema systems
outer diameter: 4.5 mm	Plug & Play: both sides	medical environments

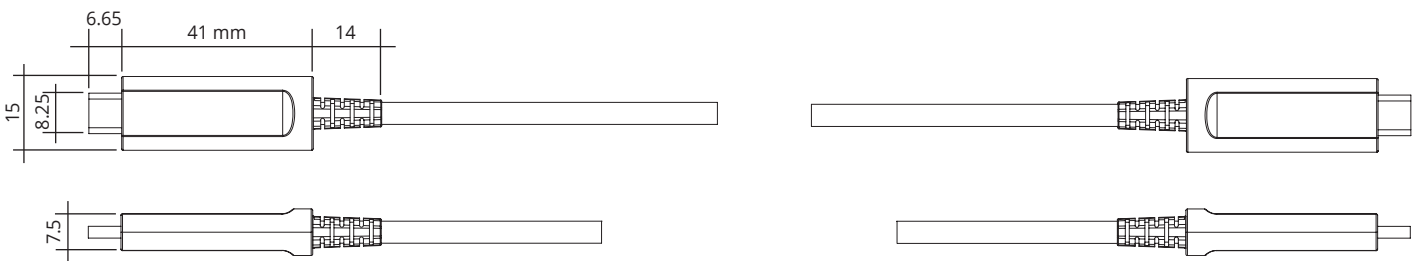

Tests	Standards
bending radius: 45 mm	DisplayPort 1.4
	*sheath: CPR classification acc. to EN 13501-6: C _{ca} -s1, d0

Colours: ■ black (cable) ■ anthracite (plugs)

Art. No.	EAN No.	Length ± Tolerance (mm)
USBC-AOC-V-10,0M	4260310266558	10,000±200
USBC-AOC-V-15,0M	4260310266565	15,000±200
USBC-AOC-V-20,0M	4260310266572	20,000±300
USBC-AOC-V-30,0M	4260310266589	30,000±400



USB 3.1 AOC Hybrid Data Cable Type C

transmission up to 10 Gbps


EMC shielded

high-quality metal housings

jacket material CPR certified



Specification	Technische Daten	Applications
connector Source: USB-C (TX)	data transmission: up 10 Gbps; 480 MB/s	public environments
connector Display: USB-C (RX)	EMI / RFI significantly reduced	industry / engineering
housing material: metal	external power supply not necessary	train stations / airports
cable structure: glass fibers / copper	power consumption: $\leq 0,5W$	events
jacket material: PVC*	temperature range: $-40^{\circ}C$ up to $+70^{\circ}C$ (operation)	home cinema systems
outer diameter: 4.5 mm	Plug & Play: both sides	medical environments

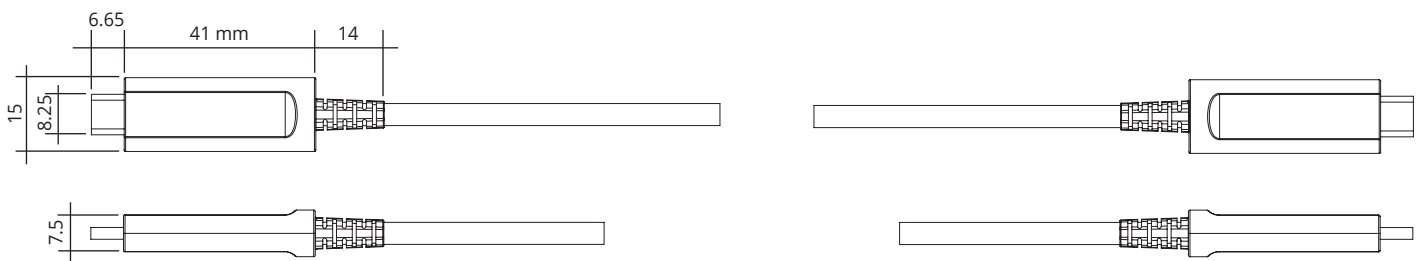

Tests	Standards
bending radius: 45 mm	USB 3.1
	*sheath: CPR classification acc. to EN 13501-6: C _{ca} -s1, d0

Colours: ■ black (cable) ■ anthracite (plugs)

Art. No.	EAN No.	Length ± Tolerance (mm)
USBC-AOC-D-10,0M	4260310266510	10.000±200
USBC-AOC-D-15,0M	4260310266527	15.000±200
USBC-AOC-D-20,0M	4260310266534	20.000±300
USBC-AOC-D-30,0M	4260310266541	30.000±400

