

Steel-Armoured HDMI 2.1 AOC Hybrid Cable

Transmission up to 8K@60Hz

Slim connector design


Extremely robust and durable

Flexible cable incl. stainless-steel armouring

High pressure and crush resistance



Specification	Features / Technical Data	Applications
Connector 1: HDMI-A Source	very slim metal connector housings	Public environments
Connector 2: HDMI-A Display	Data transmission: up to 8K/60 Hz	Industry / automation
Cable: OM3 fibers / copper wires	Temperature range: 0°C up to +50°C	Train stations / airports
Outer diameter: 3.8 mm	No external power supply necessary	Events
Jacket material: TPU		Home cinema systems
Armouring: stainless steel		Medical environments
Colours: black (cable) anthracite (connectors)		

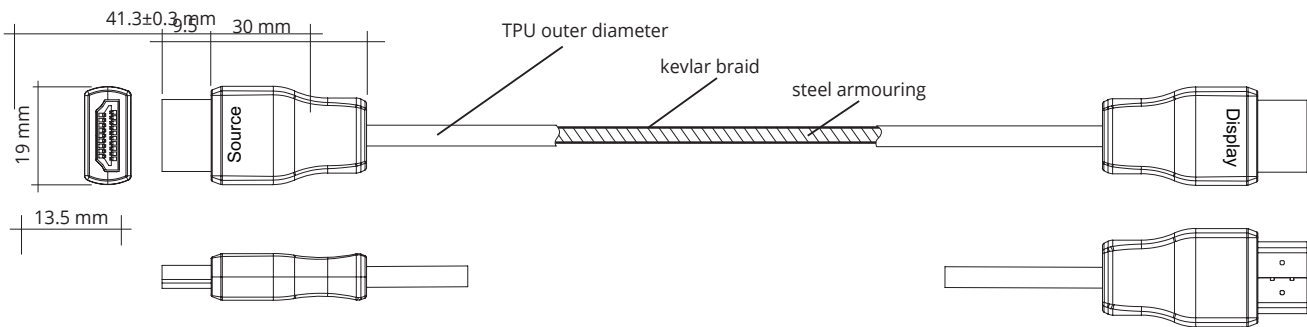

Art. No.	EAN No.	Length +/- Tolerance (mm)
HDMI-SAAOC-10,0M	4260310263090	10,000±100
HDMI-SAAOC-20,0M	4260310263106	20,000±300
HDMI-SAAOC-30,0M	4260310263113	30,000±400

